



Model 31
Detail

* Photos shown with
painted doors.



Versatility at a Great Value

Ankmar's flush wood doors offer an economical choice for beauty and versatility. These quality overhead doors have the look and feel of smooth or richly textured wood all offering strength and durability. Available for residential or commercial applications, our flush wood models beautify your home or business with style and dependable performance.

The Door You Come Home To!



Product Features & Description Chart


Model #	Description	Thickness	R-Value	Max Width	Max Height
30	Smooth finish primed	1-3/8"	6.0	18'	8'
31	Ruf-Sawn inside and out	1-3/8"	6.0	18'	8'
32	Luaun finish inside and out	1-3/8"	6.0	18'	8'
310	Smooth finish primed	1-3/8"	6.0	18'	12'
311	Ruf-Sawn inside and out	1-3/8"	6.0	18'	12'
312	Luaun finish inside and out	1-3/8"	6.0	18'	12'
300	Smooth finish primed	1-3/4"	8.5	16'2"	16'
301	Ruf-Sawn inside and out	1-3/4"	8.5	16'2"	16'

* Consult factory on sizes beyond those listed above.

Product Features & Specifications

- Expanded polystyrene insulating core is pressure bonded between two skins with waterproof adhesive to a solid wood frame.
- Models 30, 310 and 300 have a smooth finish that is prime coated. Models, 31, 311, and 301 have a "Ruf-Sawn" look that simulates a wood grain texture. Models 32 and 312 have a luaun wood finish inside and out.
- Hardware is manufactured out of hot dipped galvanized steel. Hinges are 14 gauge and rollers are nylon. 300 series doors have 10 ball steel rollers.
- Track is available in 2" or 3". Vertical Lift, High Lift, Follow The Roof Slope, and Low Headroom options are available depending on the model. Consult your dealer for details.
- Doors are balanced by a torsion spring counterbalance system constructed of oil tempered torsion springs. High cycle spring options of 50,000 or 100,000 are available.
- Doors come standard with an inside slide lock. A keyed lockbar locking system is available.
- Uninsulated window options available

Product Finishes



Smooth



Ruf-Sawn



Luaun

Construction

Top Rail


Polystyrene Core

Hardboard Panels

Bottom Rail

1-3/8" Nominal Thickness
(models 30, 31, 32, 310, 311, 312)

1-3/4"
(models 300, 301)

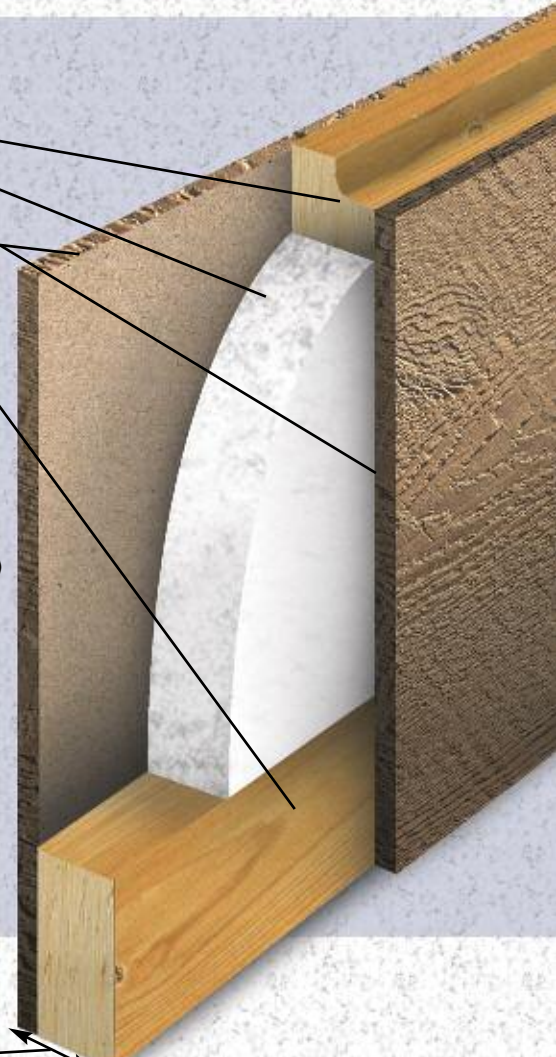

Distributed by:



As Ankmar constantly strives to improve our product, all specifications listed in this informative brochure are subject to change without notice or obligation. Printed color may vary from actual color, please check with your local dealer for color swatches.

2008 E-20-075



303-321-6051 • Fax: 303-399-6209

www.ankmardoor.com